WH1000i
Digital Inverter Generator

1000 / 1100
RUNNING WATTS STARTING WATTS

XLT Series
Extreme Low Tone

Westinghouse
INNOVATION YOU CAN BE SURE OF

WH1000i
Digital Inverter Generator

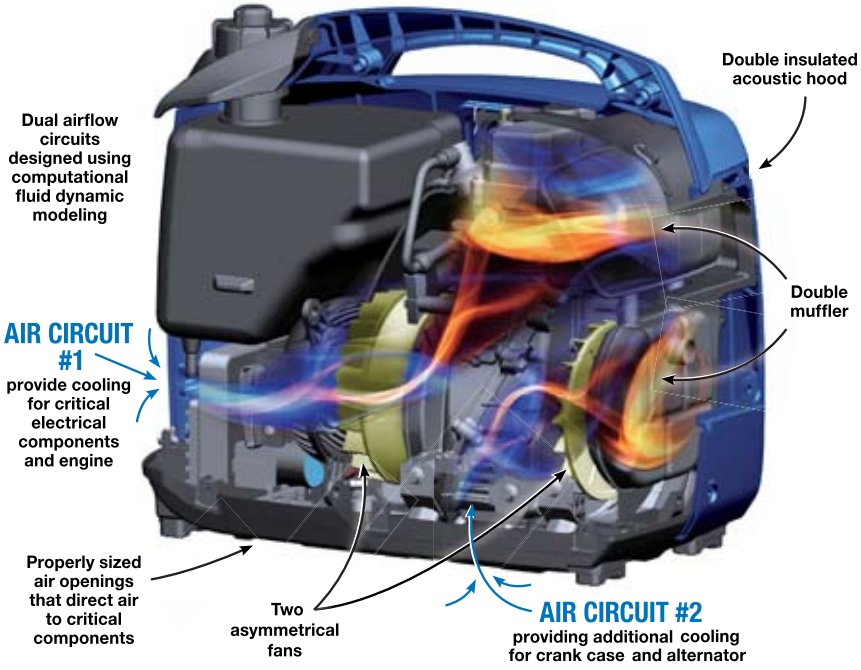

What is a Digital Inverter Generator?

Digital inverter generators work by generating AC (alternating current) power at a high frequency. It is then converted to DC (direct current), then back to alternating current that can be used by electronic equipment and appliances. This process is often called "clean power" which means stable and consistent current and a stable sine wave delivery. This will not cause a fluctuation in voltage which happens with traditional generators. Uncontrolled fluctuations of power are very dangerous to many high-tech and sensitive electronics such as computers. Inverter generators are a perfect fit for recreational use and emergency backup power.

The engine speed of inverter generators is regulated to match the load on the generator, unlike traditional generators that run at a constant speed with no variation to engine speed. Inverter generators have the ability to adjust engine speed to produce the correct amount of power required to run the appliances being used. Inverter generators are more fuel efficient and make less noise and vibration than traditional generators. This makes inverter generators economical to operate and environmentally friendly.

When you are ready to go camping, tailgating or just need a reliable portable power supply, the Westinghouse WH1000i provides efficient, quiet and clean energy for all your sensitive electronic needs.

Producing 1000 running watts of power and weighing only 30 lbs., this 4 cycle, gasoline powered unit will run 8 hours at 50% load and provides two, 120V, AC outlets. The WH1000i is very quiet making it the perfect companion for all your recreational needs.

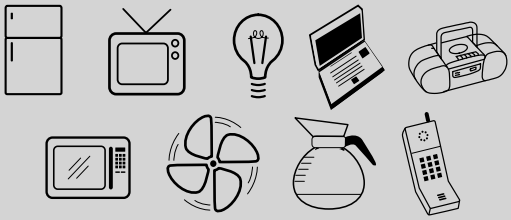

Specifications

Generator Type	WH1000i Digital Inverter
Running Watts	1000
Starting Watts	1100
Amps	8.3A / 9.1A
Engine Type	Westinghouse, 4 Stroke, 52cc, OHV
Starting Method	Recoil
Outlets	(1) Duplex, NEMA 5-15R 120 VAC
Fuel Tank	0.8 Gallon
Run Time	9.5 hours at 25% load / 8 hours at 50% load
Housing	High impact plastic, vibration mounted, sound attenuated, double insulated case
Portability	Light weight, ergonomically designed

Accessories	Tool kit and EZ fill oil bottle
Warranty	2 Year Limited
Sound Output	53 dbA at 25% load / 59 dbA at 50% load
Emissions	EPA Certified
Benefits & Features	1) Power indicator light 2) AC overload reset 3) High efficiency run mode 4) Low oil shut down 5) Color coded user touch points

Dimensions & Weight

Carton Dimensions	19.5" L x 11.2" W x 17.0" H
Unit Dimensions	18.2" L x 10.2" W x 15.2" H
Unit Weight	30 Pounds

XLT Series
Extreme Low Tone

Westpro Power Systems, LLC
W237 N2889 Woodgate Road, Unit B
Pewaukee, WI 53072 USA

Tel (262) 522-1450 Service Hotline: (855) 944-3571
www.westpropower.com Model: WH1000i August 2013

© 2013

®, WESTINGHOUSE, and INNOVATION YOU CAN BE SURE OF are trademarks of Westinghouse Electric Corporation. Used under license by Westpro Power Systems. All Rights Reserved. Content may change without notice.

Westinghouse
INNOVATION YOU CAN BE SURE OF